



Features

- State-of-the-art, fully pneumatic air motors, 3, 4, 6, 8 inches (76, 101, 152, 203 mm) diameter.
- Full six-inch stroke for greater output per cycle.
- Modular design for easy repair.
- Only five moving parts, no metal-to-metal contact.
- Newly designed pump tubes offer ratios and outputs to fit any application.
- Available to fit any drum or pail size.
- Offered in carbon steel, stainless steel or hard-chrome plated.
- Complete selection of packing materials available.
- Full line of priming equipment and mounting devices.
- Ball-style for fluid materials. Shovel foot-style for high-viscosity, non-fluid materials.

Series III Air Motors

- Full pneumatic operation for longer life and durability—only five moving parts.
- Total modular design for ease of service and maintenance.
- Quiet operation—meets or exceeds OSHA requirements at all recommended operation air pressures.
- Interchangeable with all PowerMaster® III pump tubes.
- Acceptability of pump monitors and controls.



AirBrake™

- Shuts down pump immediately when excessive pump cycle speed (runaway) occurs.
- Prevents pump damage due to a runaway condition.
- Indicates system fault caused by empty container or broken supply line.
- Limits spills due to pump outlet hose failure.
- Sends fault signal to remote alarm locations with optional 244398 signal kit.
- Tamper-proof knob (part number 273835)
- Can be ordered already installed (refer to Pump Specification Chart).
- Can be added later. Order model 85317.
- Easy to install and set—graduated dial with detents.
- Kit 273429 upgrades existing AirBrake-equipped pumps to the latest specifications
- Recommended for use where normal pump operation does not exceed 45 cycles per minute.



See Pump Selection Chart in this section.



Model 84985

Pump Tubes—Ball Foot Design

- For light- to medium-viscosity, fluid materials.
- Available in three styles: stub length for bulk mounting, 55-gallon or 16-gallon drum size.
- Complete packing selection for total chemical compatibility.
- Ratios from 6:1–42:1, outputs to 3.9 gpm (14.6 lit/min.).
- Complete interchangeability with all Series III air motors.
- Exclusive, patented, “leakless” gland assembly kit is available as an accessory.



Model 84991

Pump Tubes—Shovel Foot Design, Plunger and Bushing Style

- For medium- to high-viscosity, non-fluid materials.
- Available in 55-gallon or 16-gallon drum lengths, or mounts on pressure primer for very high-viscosity materials.
- Full range of ratios: 12:1 through 84:1 for all applications.
- Selected fit, hardened steel plunger and bushing is particularly well suited to viscous lubricants.
- No washers, o-rings or packings to replace on pump piston for ease of maintenance.
- Shovel foot adds mechanical priming to normal suction, assures positive prime with the most viscous of lubricants.
- Complete interchangeability with all Series III air motors.
- Exclusive patented, leakless gland assembly kit (to protect gland seal—the only seal in pump tube) is available as an accessory.



Model 84976

Pump Tubes—Shovel Foot Design, Packed Piston-Style

- Furnished with exclusive, patented, leakless gland assembly.
- For medium- to high-viscosity, non-fluid materials.
- Available in 55-gallon or 16-gallon drum lengths; also suitable for mounting on priming equipment or standpipe mounting for bulk delivery.
- Full range of packing materials available for product compatibility.
- Complete interchangeability with all Series III air motors.
- Full range of ratios: 10:1 through 80:1.
- Specifically designed to enhance growing market for dispensing industrial-type materials: sealants, adhesives, urethanes, inks, etc.

See Pump Selection Chart in this section.

Industrial Pumping Equipment

PowerMaster® III Pump Selection Chart



Low- to Medium-Viscosity Pumps—Carbon Steel for Transfer of Non-Corrosive Materials

Ball Pumps

Ratio	Pump Model Std. Air Motor Only	Pump Tube Style	Air Motor Model	Diameter in. / mm	Pump Tube Model	Material Outlet N.P.T.F.	Output per cycle cu. in / cc	Approximate Cycles per gal / liters
24:1	2021	55 gal	Std. 84806 w/ AirBrake *94906	6 / 152	84985	¾"	11.9 / 195	20 / 5
12:1	2001							
	2014	Stub	Std. 84804 w/ AirBrake *94904	4¼ / 108	84986			
6:1	2052	55 gal	Std. 84803	3 / 76	84985			
	2051	Stub			84986			

Shovel Foot Pumps—Packed Piston

32:1	*2076	16 gal	Std. 84804 w/ AirBrake *94904	4¼ / 108	84979	¾"	4.6 / 75	51 / 13
22:1	*2075	16 gal			84977		6.7 / 110	35 / 9
10:1	*2066	55 gal	Std. 84803	3 / 76	84976			

Shovel Foot Pumps—Plunger and Bushing

80:1	2023	55 gal	Std. 84806 w/ AirBrake *94906	6 / 152	84993	¾"	3.7 / 61	63 / 16	
75:1	2004	55 gal			Std. 84804 w/ AirBrake *94904		4¼ / 108	84997	2.1 / 34
	2008	16 gal	84998	3.0 / 49				78 / 20	
50:1	2010	55 gal	84995						6.1 / 100
	2011	16 gal	84996						
24:1	2002	55 gal	84806	6 / 152				84991	10.9 / 179
	2030	Stub				84918			
	2031	55 gal			84919				
12:1	2028	Stub	84804	4¼ / 108	84918				
	2029	55 gal			84919				

* Order pump tube and air motor separately for these models or when ordering AirBrake™ equipped models.

Other PowerMaster Air Motor/Pump Tube Combinations (all feature ¾" NPTF Material Outlet)

Carbon Steel Ball-Type

Ratio	Pump Tube Style	Air Motor Model	Pump Tube Model	Max. GPM/LPM Free Delivery 70 CPM
42	55 gal	Std. 84808 w/ AirBrake *94908	84985	3.9 / 14.6
	16 gal		84984	
	Stub		84986	
24:1	16 gal	Std. 84806 w/ AirBrake *94906	84984	
	Stub		84986	
12:1	16 gal	std.84804 W/Air	84984	

← removed 6:1

Carbon Steel Shovel-Type Plunger & Bushing

Ratio	Pump Tube Style	Air Motor Model	Pump Tube Model	Max. GPM/LPM Free Delivery 70 CPM	
84:1	55 gal	Std. 84808 w/ AirBrake *94908	84991	2.0 / 7.5	
	16 gal		84992		
80:1	16 gal	Std. 84806 w/ AirBrake *94806	84994	1.2 / 4.5	
48:1	55 gal		84991	2.0 / 7.5	
	16 gal	84992			
75:1	55 gal	Std. 84804 w/ AirBrake *94904	84999**	0.7 / 2.6	
40:1	16 gal		84993	1.2 / 4.5	
	24:1		16 gal		84994
36:1	55 gal	Std. 84803	84992	2.0 / 7.5	
	16 gal		84999**		0.7 / 2.6
			84997		
24:1	55 gal		84998	1.0 / 3.7	
	16 gal		84995		
20:1	55 gal		84996	1.2 / 4.5	
	16 gal	84993			
12:1	55 gal	84994	2.0 / 7.5		
	16 gal	84991			

* Order pump tube and air motor separately.

** For severe environment where gland nut is subject to external contamination.

Carbon Steel Shovel-Type Packed Piston

Ratio:	Pump Tube Style	Air Motor Model	Pump Tube Model	Max. GPM/LPM Free Delivery 70 CPM
80:1	55 gal	Std. 84808 w/ AirBrake *94908	84976	2.2 / 8.2
	16 gal		84977	
64:1	55 gal	Std. 84806 w/ AirBrake *94906	84978	1.5 / 5.7
	16 gal		84979	
44:1	55 gal		84976	2.2 / 8.2
	16 gal		84977	
32:1	55 gal	Std. 84804 w/ AirBrake *94904	84978	1.5 / 5.7
22:1	55 gal		84976	2.2 / 8.2
15:1	55 gal	Std. 84803	84978	1.5 / 5.7
	16 gal		84979	
10:1	16 gal		84977	2.2 / 8.2

Ball Pumps

Gallons / Liters Per Minute			Min. ID Air Supply Hose in. / mm	Air Consumption Per Cycle			
30 CPM	50 CPM	75 CPM		S.C.F.M. @ 70 psig	M ³ /Min. @ 4.8 bar	S.C.F.M. @ 100 psig	M ³ /Min. @ 6.8 bar
1.5 / 5.8	2.6 / 9.7	3.9 / 14.6	½" / 12	1.1	0.031	1.6	0.045
			¾" / 10	0.8	0.023	1.1	0.031
			¾" / 10	0.5	0.014	0.7	0.02

Shovel Foot Pumps—Packed Piston

0.6 / 2.3	0.9 / 3.3	1.5 / 5.7	½" / 12	0.8	0.023	1.1	0.031
0.9 / 3.3	1.5 / 5.5	2.2 / 8.2					
0.9 / 3.3	1.5 / 5.5	2.2 / 8.2	¾" / 10	0.5	0.014	0.7	0.02

Shovel Foot Pumps—Plunger and Bushing

0.5 / 1.8	0.8 / 3.0	1.2 / 4.5	½" / 12	1.1	0.031	1.6	0.045
0.3 / 1.0	0.5 / 1.7	0.7 / 2.6		0.8	0.023	1.1	0.031
0.4 / 1.5	0.6 / 2.5	1.0 / 3.7					
0.8 / 3.0	1.3 / 5.0	2.0 / 7.5		1.1	0.031	1.6	0.045
1.4 / 5.4	2.4 / 8.9	3.5 / 13.4		0.8	0.023	1.1	0.031

Note: Air motors and pump tubes shipped separately. Assembly required.

Other PowerMaster Air Motor/Pump Tube Combinations (all feature ¾" NPTF Material Outlet)

Hardened Steel Ball-Type


Ratio	Pump Tube Style	Air Motor Model	Pump Tube Model	Max. GPM/LPM Free Delivery 70 CPM
42:1	55 gal	84808 w/ AirBrake *94908	84983	3.9 / 14.6
24:1		84806 w/ AirBrake *94906		
12:1		84804 w/ AirBrake *94904		
6:1		84803		

Chrome Plated Ball-Type

Ratio	Pump Tube Style	Air Motor Model	Pump Tube Model	Max. GPM/LPM Free Delivery 70 CPM
42:1	55 gal	84808 w/ AirBrake *94908	84982	3.9 / 14.6
24:1		84806 w/ AirBrake *94906		
12:1		84804 w/ AirBrake *94904		
6:1		84803		

Stainless Steel Ball-Type

Ratio	Pump Tube Style	Air Motor Model	Pump Tube Model	Max. GPM/LPM Free Delivery 70 CPM
42:1	55 gal	Std. 84808 w/ AirBrake *94908	84981	3.9/14.6
	Stub		84987	
24:1	55 gal	Std. 84806 w/ AirBrake *94806	84981	
	Stub		84987	
12:1	55 gal	Std. 84804 w/ AirBrake *94804	84981	
	Stub		84987	
6:1	55 gal	84803	84981	
	Stub		84987	

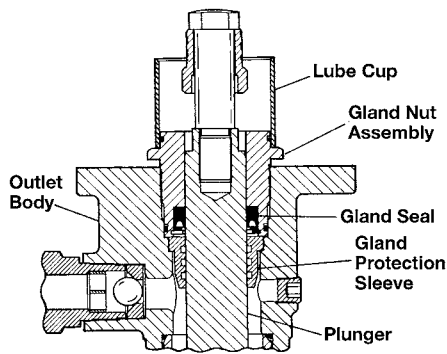

Patented* Leakless Gland Assembly

The gland seal of all reciprocating positive displacement pumps is its weakest point and is the single most common cause of pump failure, lost downtime and maintenance expense. Lincoln's new gland design uniquely addresses the causes for premature gland seal failure.

A special protective bushing (or sleeve) with concentric grooves creates a labyrinth path to reduce the internal operational pressure as well as the pressure fluctuations developed during pump stroke changeover.

Leakless gland assembly is standard with packed piston pumps and is available for all PowerMaster III pumps as an accessory.

* U.S. Patent No. 4,976,192

Gland Protection Sleeves



Model 86214

Order Model	For Pump Tubes
86214	All Ball Foot Design Pump Tubes
86215	84997 & 84998
86216	84993 & 84994
86217	84995 & 84996
86218	84991 & 84992

Model 86213 Lube Cup Kit

For all PowerMaster® III pump tubes. Used in conjunction with the gland protection sleeve to prolong service life of gland packing. Prevents material from drying out on plunger.



Model 86213

Packing Kits for PowerMaster® III Pump Tubes

Lincoln offers alternate packing kits of PTFE for some PowerMaster III pump tubes because many materials used in today's manufacturing environment may not be compatible with the standard seals. Please consult Lincoln for compatibility of the material to be dispensed with standard packings or alternate packing kits.



Model 84502

Pump Tube	PTFE Kit
84982	84502
84984	
84985	
84986	
84987	



Model 86268

Model 86268 3" Male Camlock Adapter for PowerMaster® III Pump Tubes

Adapts Lincoln PowerMaster pump tubes to tanks and totes equipped with 3" female mil spec camlock outlet.



Model 81412

Drum Covers
Model 81412

Standard 55-gallon drum cover for mounting PowerMaster III series drum pumps on full, open drums.



Model 83166

Model 83166

Special 55-gallon drum cover for mounting PowerMaster III series drum pumps on full, open drums. Includes port for installation of material agitator.



Model 81538

Model 81538

Standard 16-gallon drum cover for mounting PowerMaster III series drum pumps on full, open drums.



Model 83369

Follower Plates
Model 83369

For 400-pound drums.



Model 83132

Model 84780

For 120-pound drums.



Model 84963

Model 83132 Bung Bushing

This 55-gallon drum bung bushing screws into the bung opening of the drum to secure any Lincoln PowerMaster III pump.



Model 84826

Model 84963 Flange Mounting Assembly

Used for rigid mounting of PowerMaster III pumps to the top of fabricated bulk tanks.



Model 84826

Model 84826 Wall Mount Bracket Kit

For PowerMaster III air motor assemblies.



Model 16177

Model 84945 Suction Kit

Used with PowerMaster III stub pumps for convenient transfer of petroleum products from drums, bulk tanks or reservoirs. Includes bung bushing suction tube, hose and coupling assembly and other hardware.

2"x1" bell reducer required—not included.

Model 16177 Foot Valve Adapter

Converts inlet of models 84984 and 84985 Ball-Type PowerMaster III pumps to 1½" NPTF female thread for attaching extension pipe.



Model 84377

Drum Dollies

Model 84377

55-gallon (400 lbs) band-type drum dolly with four swivel casters and screw clamps.

Model 84192

16-gallon (120 lbs) band-type drum dolly with four swivel casters and screw clamps.



Model 83727

Model 83727 Standpipe/Model 83732 Adapter Kit

Use of model 83732 adapter & bracket kit will enable PowerMaster III pumps to be assembled to model 83727 stand pipe for pumping from bulk tanks. Inlet 3" NPT female.

Elevator, Primer and Pressure Primers

Lincoln's mounting accessories include an elevator (Model 1709) to facilitate drum change-over by lifting the pump from an empty drum and lowering it into a new drum with minimum effort. Primers and pressure primers are available for positive priming of viscous materials which are forced into the pump inlet by the downward force of the follower. Models are available for most applications from 5-gallon pails to 55-gallon drums. Models include followers with O-ring seals (single O-rings for 5-gallon pail units and double O-rings for 55-gallon drum units) which seal the container of material from outside contamination and drying while wiping the container's sides clean.

Pressure primers include a four-way valve which permits the air supply to be coupled to the unit at all times. Use of an air regulator and gauge is recommended. In order to prevent damage to pumps caused by operating after a drum is empty, a low-level air cut-off assembly is recommended.




Model 1709

Model 2716



Model 1701

Model 1704

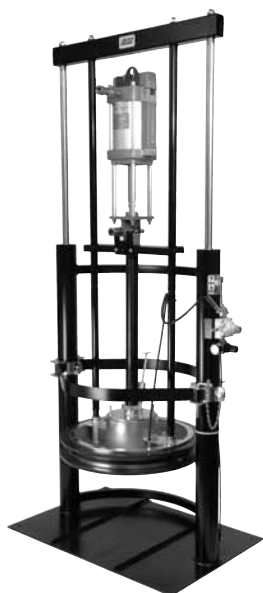

Model 1736

Model	For Drum Size Gal.	Description	Operating Air Pressure psi / bar	Priming Pressures PSI / Bar		Height		Base Dim. in. / mm
				@70 4.9	@100 7	Lowered in. / cm	Raised in. / cm	
1709	55	Single Post Elevator	50-200 / 3-14			73 / 185.4	112 / 284.5	NA Beam Length 19 / .5 360° Rotation
2716	55	Single Post Pump Hoist & Follower for low- to med.-viscosity materials 100K to 200K centipoise range	40-200 / 3-14	NA	NA	73 / 185.4	110½ / 280.7	12½ x 14 317.5 x 355.5
1701 **	5	Single Post for viscous material over 500K centipoise	30-150 / 3-10	4.4 .3	6.3 .44	42½ / 108	50½ / 128	22¼ x 22¼ 600 x 600
1704	55		40-100 / 3-7	5 .35	7.1 .5	89 / 226	89 / 226	26 x 26 700 x 700
1736	55	Twin Post for viscous materials in the 200K to 500K centipoise range	40-150 / 3-10	2.7 .2	3.7 .26	66⅞ / 167.6	103 / 261.6	24 x 36 600 x 1000


Notes:

**Model 83943 portability kit is available for Model 1701. Includes axle and wheels.

For pressure primers for 120 lb. drum pumps or for follower rings of materials other than standard Buna-N, contact Lincoln Technical Services.

Note:

Pumps not included with pressure primers.

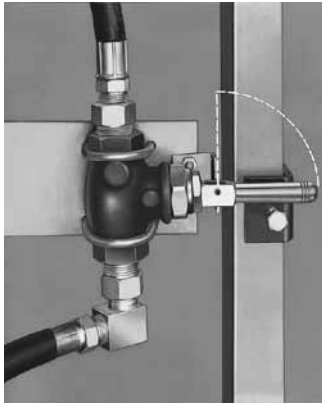

Low-Level Air Cut-Off Assembly
Model 83811


For use with Model 1704 pressure primer. Mounts directly to elevator support. Automatically shuts off air flow to pump when drum of material is emptied. Eliminates unnecessary parts wear caused by continuous pump action when drum is empty. Inlet 3/4" N.P.T.(F).

Model 83970

Same as Model 83811, except for use with Model 2716.

Model 84143

Same as Model 83811 except for use with Model 1736.

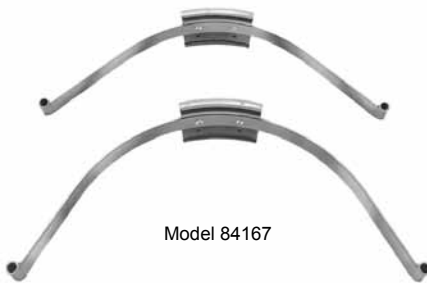

Model 84167

Chimeless Drum Kits

Because some materials are supplied in straight-sided or chimeless drums, Lincoln has developed hold-down kits which facilitate follower and pump extraction from these drums. Kits are available as follows:

Kit No.	For model PowerMaster® III
84167	1704
84503	1736



Model 85387-8
 Included in 84144 Kit

Airline Kits for Primer and Pressure Primers
Model 84144

Includes filter-lubricator-regulator, bracket and fittings to adapt air accessories to Models 2716, 1736 and 1704. Includes 1/2" controls.

Model 84141

Same as Model 84144, except includes 3/4" controls.



Model 84722

Model 84722 Series III Air Motor Exhaust Adapter

Replaces standard muffler. Converts exhaust port to 3/4" NPT female thread.



Model 84723

Model 66764 Muffler with 3/4" NPT Male Thread

Fits on Model 84722.

Model 84723 Series III Air Motor Cover Panel Kit

Metal cover fits over tie rods. Encloses moving plunger rod.