


# Bulk oil, diesel exhaust fluid (DEF) packages

Diesel exhaust fluid (DEF) equipment .....	139
Accessories .....	140



*Model 85623*

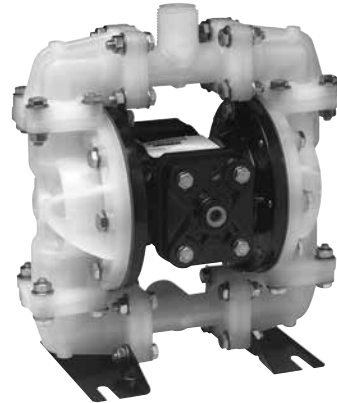

*Model 85700-50*

# Diesel exhaust fluid (DEF) equipment

## Lincoln's heavy-duty answer to the EPA's new emission regulations

### Hose reels

- DEF-specific reels are smaller and easier to operate
- Designed for versatile installation options
- Steel reel with stainless steel fluid paths

### Air-operated diaphragm pump

- Environmentally friendly – no motors, seals or packing to leak
- Self-priming


### Transfer pumps

#### Model 1390 manual barrel pump

- DEF (diesel exhaust fluid) compatible
- Transfers popular shop fluids including acetone, antifreeze, windshield washer, thinners, and much more
- Includes NPT and buttress threads for steel and plastic drums
- Adjustable bung type fits 15-, 16-, 30- and 55-gallon drums
- Welded ground-post for safe dispensing of volatile fluids
- Premium-grade 316 stainless steel
- Easy fluid control; no splashing
- Self-priming
- Meets CA Proposition 65 and EU REACH standards

#### Model 1392 lever-action DEF transfer pump

- DEF (diesel exhaust fluid) compatible
- Locking ring enables optimal pump positioning
- Nozzle hanger keeps hose within reach and off the floor
- Designed for automotive, trucking, agriculture and construction applications
- Transfers bulk fluid to smaller DEF containers or directly into vehicle reservoirs
- Self-priming pump unit

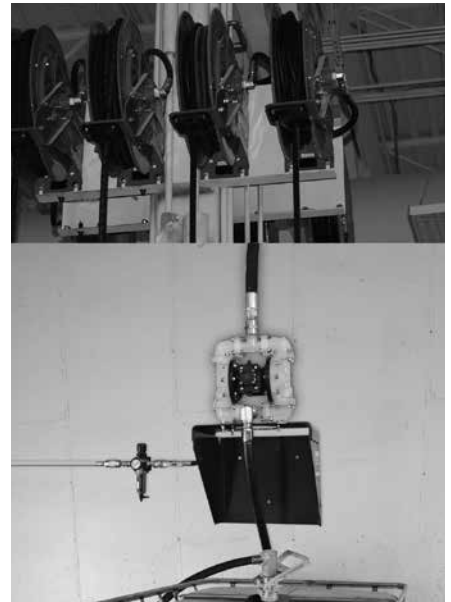

Model 85700-50



Model 85623



Model 1390



Model 1392



### Hose reels

Model	Description
85700-30	1/2 in. x 30 ft. (9,2 m) DEF hose on reel
85700-50	1/2 in. x 50 ft. (15,2 m) DEF hose on reel
277265	1/2 in. x 2 ft. (0,6 m) reel inlet hose with 1/2 in. BSPP threads
277266	1/2 in. x 30 ft. (9,2 m) hose with 1/2 in. BSPP threads
277267	1/2 in. x 50 ft. (15,2 m) hose with 1/2 in. BSPP threads



## Meters and dispense valves

### Model 277255 stainless steel automatic nozzle

- 3/4 in. BSPP threads
- 50 psi (3,4 bar) maximum pressure

### Model 277256 DEF meter

- 2 to 20 gallon/min. (7 to 75 liter/min.) flow range
- ± 0.5% accuracy
- 3/4 in. female BSPP inlet/outlet
- Maximum pressure 120 psi (8,3 bar)
- LCD display



## Accessories

- Couplers
  - Disposable drums and totes
  - Returnable drums and totes
  - 3/4 in. BSPP female threads
- Dip tubes
  - Drums
  - 275 gallon (1 041 liter) totes
  - 330 gallon (1 249 liter) totes



### Accessories

Model	Description
277230	Coupler, 3/4 in. hose barb for colder-style drum insert
277219	Coupler, 3/4 in. hose barb for micro-matic drum insert
277232	Coupler, 3/4 in. male BSPP
277233	Drum insert, 2 in. (51 mm) buttress thread
277234	Drum insert, 2 in. (51 mm) NPS (ISO G2) thread, colder style for plastic 55 gallon (208 liter) drums
277235	Dip tube, 35 1/2 in. (902 mm) long for 55 gallon (208 liter) drums, colder style for 275/330 gallon (1 041/1 249 liter) totes
277236	Dip tube, 39 in. (991 mm) long for 275 gallon (1 041 liter) IBCs
277237	Dip tube, 39 in. (991 mm) long for 330 gallon (1 249 liter) IBCs
277239	Air filter, 3/4 in. NPT (m), 70 micron - recommended for colder-style coupler
277254	3/4 in. x 12 ft. (3,7 m) hose with 3/4 in. BSPP threaded fittings
277258	3/4 in. x 6 ft. (1,8 m) hard wall suction hose with 3/4 in. BSPP stainless fittings plus hose barb
277633	1/2 in. x 5 ft. (1,5 m) hose with 1/2 in. BSPP threads
277635	3/4 in. x 6 ft. (1,8 m) suction hose with hose barb