


Diesel exhaust fluid (DEF) handling equipment

Power, durability and reliability for stationary, installed and portable service applications in heavy-duty shops

Lincoln's heavy-duty answer to the EPA's new emission regulations

- **Air-operated diaphragm pump**
 - Environmentally friendly – no motors, seals or packing to leak
 - Self-priming
- **Hose reels**
 - DEF-specific reels are smaller and easier to operate
 - Designed for versatile installation

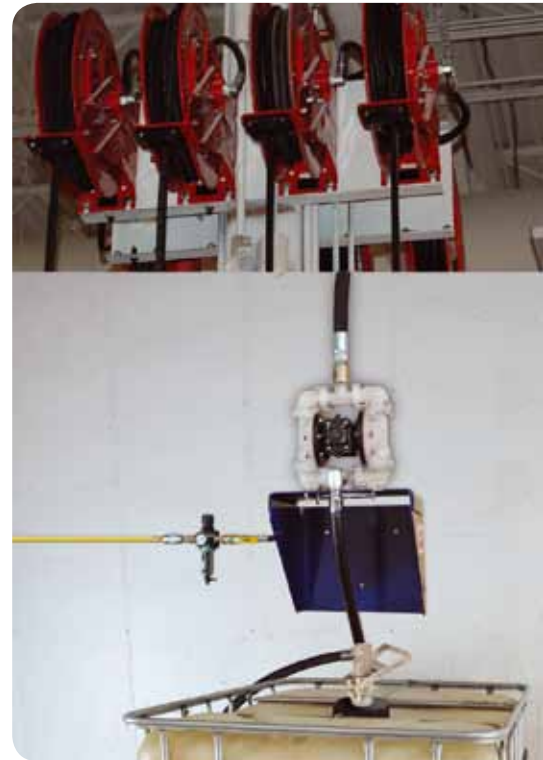

Diesel exhaust fluid (DEF) handling equipment



IBC tote

- Electric or air operated
- 275/330 gallon
- Dispense at tote
- Pipe to reels



55-gallon drum

- Electric
- Portable
- Stationary
- Air operated
- Stationary



Hose reels/dispense valves

- Accurate to $\pm 0.5\%$
- Simple, one-step calibration
- 2–20 gallon/min flow rate, 120 psi maximum pressure
- Liquid crystal display
- 3/4 in. BSPP

Meters

- 2-line LCD register
- Accurate to $\pm 0.5\%$
- 1/2 in. BSPP threads
- 0.3–9 gallon/min flow rate



AC electric pump

- High-wattage motor works harder with less effort
- 110 VAC or 12 V DC stainless steel rotary vane pump, small, compact
- Self priming, continuous duty, 0.5 hp, 3,450 r/min
- 8 gallon/min flow rate, 29 psi maximum pressure



Accessories

- Couplers with hose barb connection
- Colder type
- Micro-matic type
- Drum inserts and downtubes
- Drums
- 275 gallon totes
- 330 gallon totes

© SKF is a registered trademark of the SKF Group.

© Lincoln is a registered trademark of Lincoln Industrial Corp.

© SKF Group 2011

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

SKF PUB LS/P2 12271 EN.R1 · October 2011 · FORM 444053

