

LINCOLN

Model 1550 fuel transfer pump

From the brand you trust

Lincoln's model 1550 fuel transfer pump quickly delivers diesel, kerosene or mineral spirits from both mobile and stationary tanks. Its durable cast-iron housing, long-life, low-friction vanes, special seal design, UL-listed motor and stainless steel outlet adapter provide reliability in even the harshest environments.

The pump's unique, three-piece, telescoping pick-up tube is suitable for a wide range of tank depths and designs, and its 360-degree, locking bung enables the operator to properly position the pump. The model 1550 delivers fuel at a rate of 15 gal./min. (57 l/min) and comes with a 13 ft. (4 m), commercial-grade, anti-static hose that is kink resistant for uninterrupted flow.



SKF


Quickly transfers fuel in agricultural, construction, mobile equipment and fleet applications



Model 1550 technical data

| | |
|--------------------------|---|
| Voltage | 12 V DC |
| Flow rate | 15 gal./min. (57 l/min.) |
| Pump inlet/outlet | 1 in. (25,4 mm) NPT |
| Hose connection | 3/4 in. (19 mm) NPT |
| Power cord length | 18 ft. (5,5 m) with heavy-duty connectors |
| Duty cycle | 30 min. |
| Locking bung | Yes |
| Hose | 13 ft. x 3/4 in. ID (4 m x 19 mm ID) |
| UL-listed motor | Yes |
| Inlet filter | Yes |
| Outlet adapter | Stainless steel |

Model 1550 fuel transfer pump

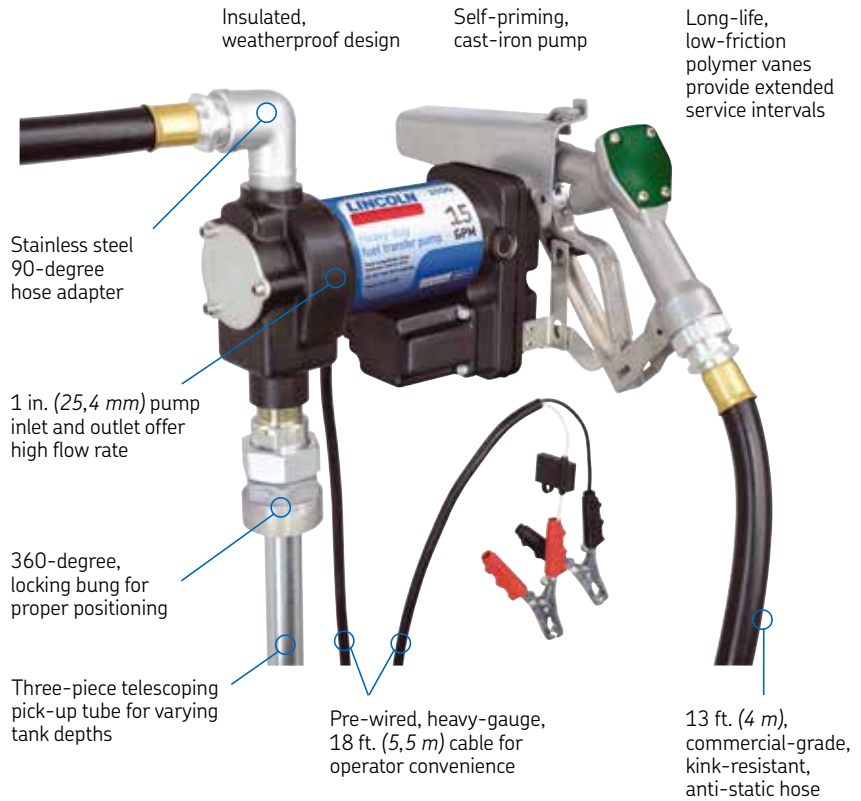

Please contact:

SKF USA, Inc.

One Lincoln Way

St. Louis, MO 63120 USA

Tel. +1 (314) 679-4200

This brochure was presented by:

© SKF is a registered trademark of the SKF Group.

© Lincoln is a registered trademark of Lincoln Industrial Corp.

© SKF Group 2014

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

SKF PUB LS/P2 14971 EN · September 2014 · FORM 444599

