

# Model 3662 13-gallon pit drain

Compact, low-profile 13-gallon pit drain  
for low clearance/low volume applications

Lincoln model 3662 pit drain offers a compact, low-profile design for track mounting applications with restricted clearance. It's ideal for installation in pits with limited headroom, or on floors where low clearance is required for drive-over applications. Each drain is capable of collecting and storing up to 13 gallons of used fluid. Multiple drains can be tethered together for additional capacity requirements.

**Features:**

- 13-gallon (50 liter) capacity heavy-duty welded steel reservoir
- Low-profile design requires only 8 in. (200 mm) of clearance
- Four wheel and axle assemblies extend and lock to fit tracks ranging from 28 in. to 50 in. apart
- Internal baffles reduce splash during movement
- Includes removable screen to catch parts and debris and for draining filters
- Drain outlet includes ball valve and  $\frac{3}{4}$  in. cam lock coupler with leak-proof cap
- Handles on both ends make drain easy to maneuver
- 2 in. wide stepped-diameter wheels are reversible for locating the shoulder on the inside or outside of the track



# Model 3662 13-gallon pit drain

The 3662 reservoir has opposing male  $\frac{3}{4}$  in. NPT outlets. The ball valve and cam lock coupler assembly can be installed on one side, while the opposite is either capped or linked to a second drain using a common  $\frac{3}{4}$  in. x  $\frac{3}{4}$  in. pipe fitting. The drain can be emptied using gravity or a diaphragm pump system such as the Lincoln 4100.

## Specifications


### Capacity

13 gallons (50 liters) to top of reservoir  
10 gallons (38 liters) to screen

### Weight

48 lbs. (21 kg)

Use Lincoln model 4100 diaphragm pump evacuation system for convenient evacuation of used fluid equipment with  $\frac{3}{4}$  in. cam lock connector

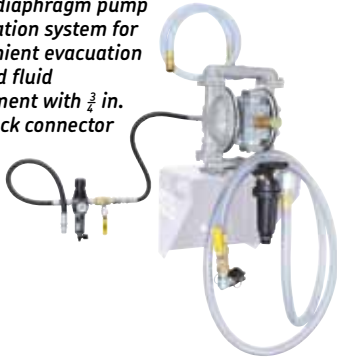

Use Lincoln  $\frac{3}{4}$  in. X  $\frac{3}{4}$  in. female cam lock connector (276411) for a quick, clean connection to the 3662 drain port (included with model 4100)



Internal baffles prevent sloshing and spills


Large screen catches parts and debris and is convenient for draining filters



Includes handles for maneuvering and support



Includes ball valve and  $\frac{3}{4}$  in. cam lock style coupler with leak-proof cap

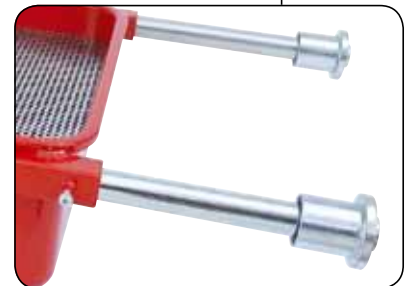

Wheel & axle assemblies extend and lock independently

© SKF is a registered trademark of the SKF Group.

© Lincoln is a registered trademark of Lincoln Industrial Corp

© SKF Group 2011

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

FORM 444563 • September 2011

